

Applicable Military Standards

Military Test Items	American Standard	810C		810D		810E		810F	
		Method	Procedure	Method	Procedure	Method	Procedure	Method	Procedure
Low Pressure		500.1	I	500.2	I,II	500.3	I,II	500.4	II
High Temperature		501.1	I,II	501.2	I,II	501.3	I,II	501.4	I,II
Low Temperature		502.1	I	502.2	I,II	502.3	I,II	502.4	I,II
Temp. Shock		503.1	I	503.2	I	503.3	I	503.4	I
Solar Radiation		505.1	I	505.2	I	505.3	I	505.4	I
Rain		506.1	II	506.2	II	506.3	I,II	506.4	I
Humidity		507.1	II	507.2	II,III	507.3	II,III	507.4	I
Salt Fog		509.1	I	509.2	I	509.3	I	509.4	I
Dust		510.1	I	510.2	I	510.3	I	510.4	I
Vibration		514.2	VIII,X	514.3	I	514.4	I	514.5	I
Shock		516.2	I,II,V	516.3	I,IV	516.4	I,IV	516.5	IV

General

Frequency Range	446.00625-446.09375MHz
Channel Capacity	16
Channel Spacing	12.5KHz
Operating Voltage	7.4V DC
Standard Battery	2000mAh (Li-ion)
Battery Life (5-5-90 Duty Cycle)	25hours
Frequency Stability	± 2.5ppm
Operating Temperature	-25~+65°C
Dimensions (H×W×D)(with battery, without antenna)	119mm×55mm×36mm
Weight (with antenna & battery)	282g
Shock & Vibration	Compliant with MIL-STD 810 C/D/E/F
Dust & Humidity	IP66

Transmitter

RF Power Output	≤0.5W
Modulation	11K Φ F3E
Spurious and Harmonics	-36dBm (frequency <1GHz) -30dBm (frequency >1GHz)
Modulation Limiting	≤2.5KHz
Audio Distortion	≤5%

All Specifications are tested according to applicable standards, and subject to change without notice due to continuous development.


Receiver

Sensitivity	0.25/0.28 μ V
Adjacent Channel Selectivity	≥60dB
Intermodulation	≥60dB
Spurious Response Rejection	≥70dB
S/N	≥40dB
Rated Audio Power Output	800mW
Rated Audio Distortion	≤5%(800mW)

HYT
Two-way Radio

POWER446

Professional
License-free Two-way Radio

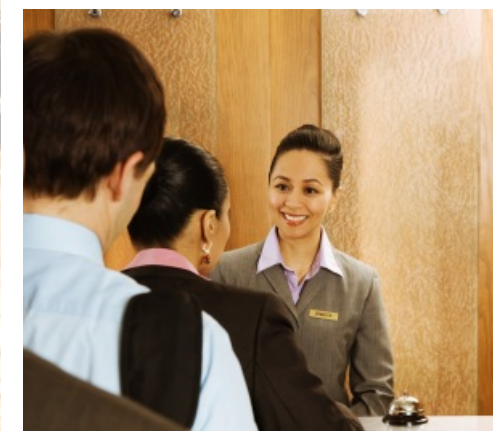

- License-free Radio
- Dust / Water Protection Class IP66
- Longer Battery Life
- Enhanced Voice Quality

Hytera
Respond & Achieve



Hytera Communications Corporation Limited

Address: HYT Tower, Hi-Tech Industrial Park North, Beihuan Rd.,
Nanshan District, Shenzhen, China
Tel: +86-755-2697 2999 Fax: +86-755-8613 7139 Post: 518057
Http: //www.hytera.cn

Hytera retains right to change the product design and specification. Should any printing mistake occur, Hytera doesn't bear relevant responsibility. Little difference between real product and product indicated by printing materials will occur by printing reason.

HYT, Hytera are registered trademarks of Hytera Co., Ltd. © 2010 Hytera Co., Ltd. All Rights Reserved.

Your Local Dealer



LEWEL Radiokomunikacja sc

09-410 Płock, ul. Boryszewska 32
tel. 24 3674224, +48 606223958
www.lewel.pl, kontakt@lewel.pl
www.sklep.lewel.pl

UK201 01013A

www.hytera.cn

Hytera Communications Corporation Limited



Designed with usability as the priority, POWER446 excels with easy operation, clear voice and long battery time. Rugged, reliable and IP66 water / dust -proof, it enables you to focus on your task in various harsh scenarios. Take POWER446 anywhere you go, and enjoy smooth communication anytime.

POWER446

Professional License-free Two-way Radio

Leading Features

License-free Radio

Provides you with charge-free communication easily.

Dust/Water Protection Class IP66

Ensures protection against dust and strong water jets.

Longer Battery Life

Equipped with a 2000mAh battery for 25 hours service time on a 5-5-90 basis.

Enhanced Voice Quality

With a 45mm speaker, POWER446 employs advanced voice technologies to better the sound quality during your communication.

Applications

- Hospitality
- Manufacturing
- Retail
- Port
- Construction



Main Functions

Monitor

CTCSS / CDCSS and Squelch Tail Elimination

VOX

Channel Scan

Battery Save

Low Battery Alert

Busy Channel Lockout

Time-out Timer (TOT)

PC Programmable

Wired Clone

Squelch Levels Selectable

Accessories

Standard Accessories	Li-Ion Battery Power Adapter	Belt Clip Charger	Strap
----------------------	------------------------------	-------------------	-------

Optional Accessories

Note: Pictures above are for reference only and may vary from actual product.